


aluplast®



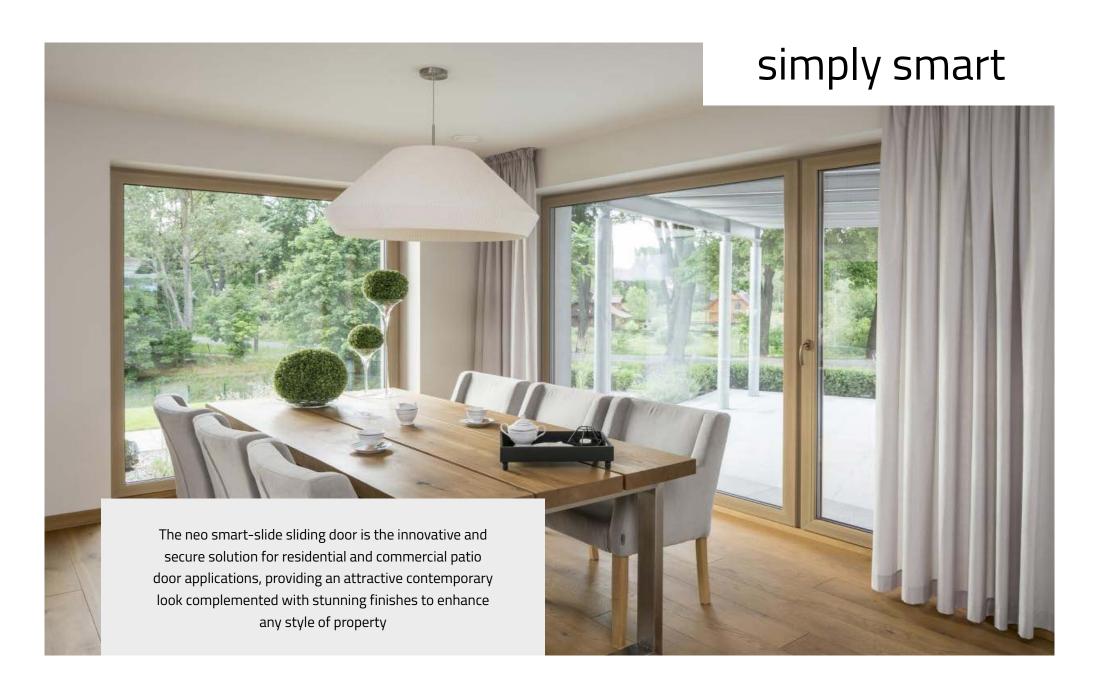

Operation

Easy opening is achieved by turning the handle clockwise from the locked position. When opened, the sash is lifted away from gaskets and allows it to slide with minimal force.

The sash can be partially opened and locked in any position by rotating the handle 180 degrees for example, to provide greater ventilation. To fully lock, turn the handle anti clockwise and once locked, the door is secured around the perimeter, ensuring exceptional performance and security.

Slim profile sightlines ensure expansive glass coverage, enhancing the feeling of spaciousness while seamlessly blending indoor and outdoor spaces. An optional soft close mechanism automatically slows the door to the frame in a quiet and gentle motion.














Technical Specifications

Frame Depth	154 mm
Sash Depth	78 mm
Max Width	6000 mm
Max Height	2500 mm
Glazing	Max 54 mm
Best U-Value	0.57W/m²K
Air	Class 4 (1600Pa)
Water	Class 9A (600Pa)
Acoustic	39dB
Parallel Opening Gap 7mm	



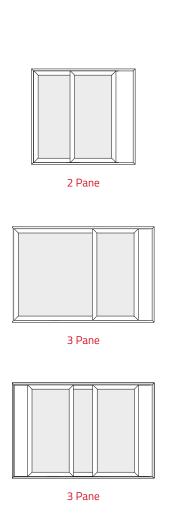


4 Pane




Colour Options

All Aluplast, Aludec and Woodec coloured foil finishes feature innovative "Cool-Colour Technology." These special patent-protected pigments considerably reduce the surface temperature of coloured foil finished profiles, enhancing performance characteristics of the surface finish.

Woodec Woodec illustrates the appearance of real wood with a unique character combined with all the advantages of our excellent product range. Woodec also realistically recreates a wood surface visually and to the touch, thanks to deep embossing and a matt top layer. Sheffield Oak Alpine Sheffield Oak Concrete Turner Oak Toffee Turner Oak Malt Turner Oak Walnut Turner Oak Amber

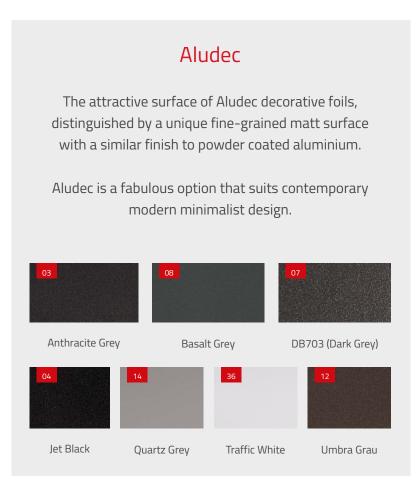

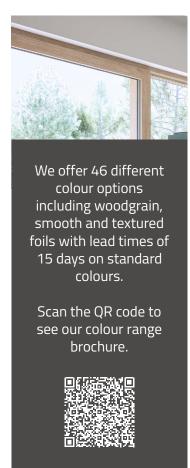







To find out more about



















